
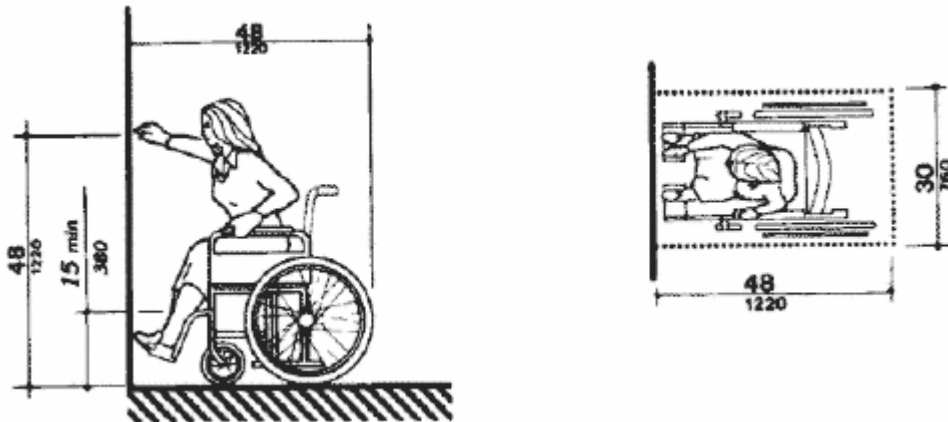


ITEM 4.2.5 | SPACE ALLOWANCE AND REACH RANGES - FORWARD REACH

If the clear floor space only allows forward approach to an object, the maximum high forward reach allowed shall be 48 in (1220 mm) (see Fig. 5(a)). The minimum low forward reach is 15 in. (380 mm). If the high forward reach is over an obstruction, reach and clearances shall be as shown in Fig. 5(b).

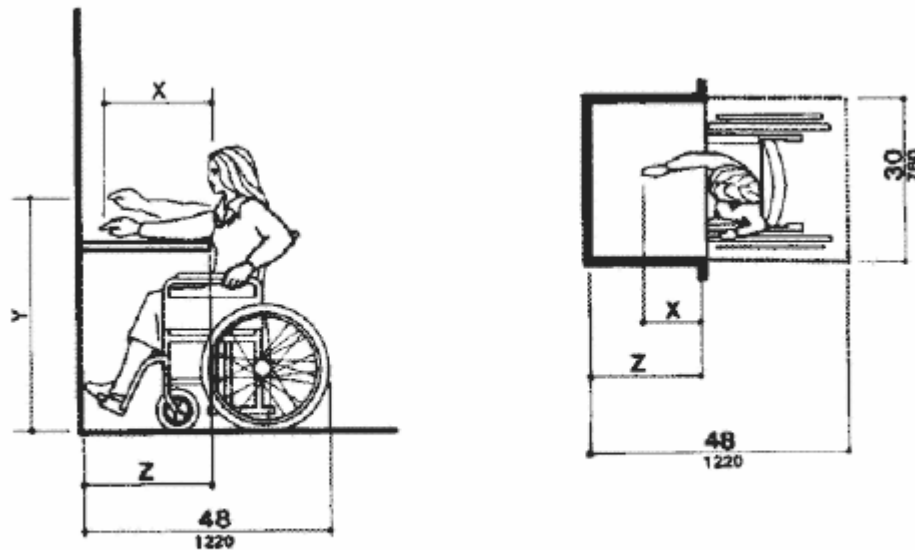

(a)

High Forward Reach Limit

(b)

Maximum Forward Reach over an Obstruction

Fig. 5

Forward Reach

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)

