

ITEM 4.32.2 | FIXED OR BUILT-IN SEATING AND TABLES - SEATING

If seating spaces for people in wheelchairs are provided at fixed tables or counters, clear floor space complying with 4.2.4 shall be provided. Such clear floor space shall not overlap knee space by more than 19 in (485 mm) (see Fig. 45).

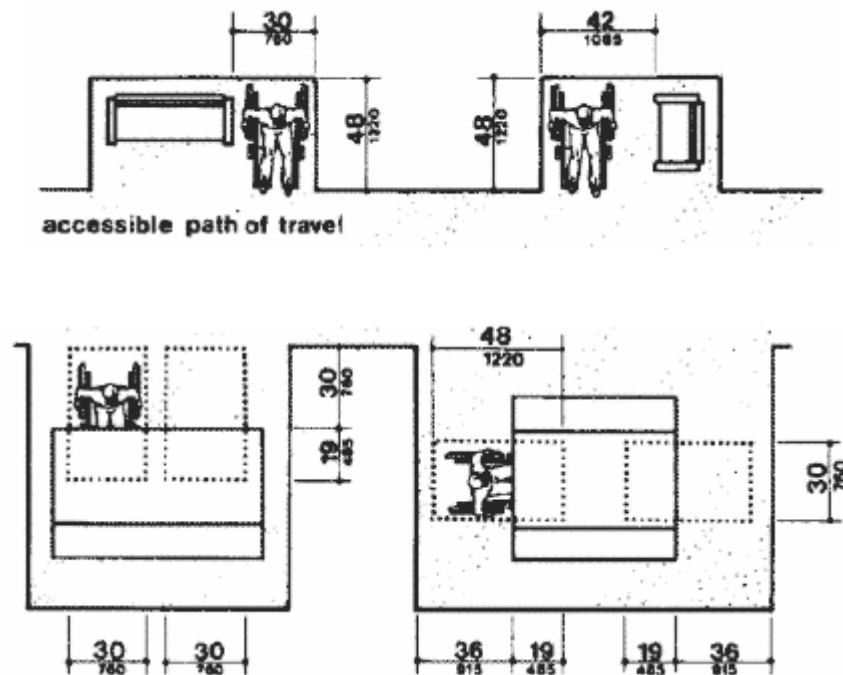


Fig. 45
Minimum Clearances for Seating and Tables

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)