

ITEM 4.3.3 | ACCESSIBLE ROUTE - WIDTH

The minimum clear width of an accessible route shall be 36 in (915 mm) except at doors (see 4.13.5 and 4.13.6). If a person in a wheelchair must make a turn around an obstruction, the minimum clear width of the accessible route shall be as shown in Fig. 7(a) and (b).

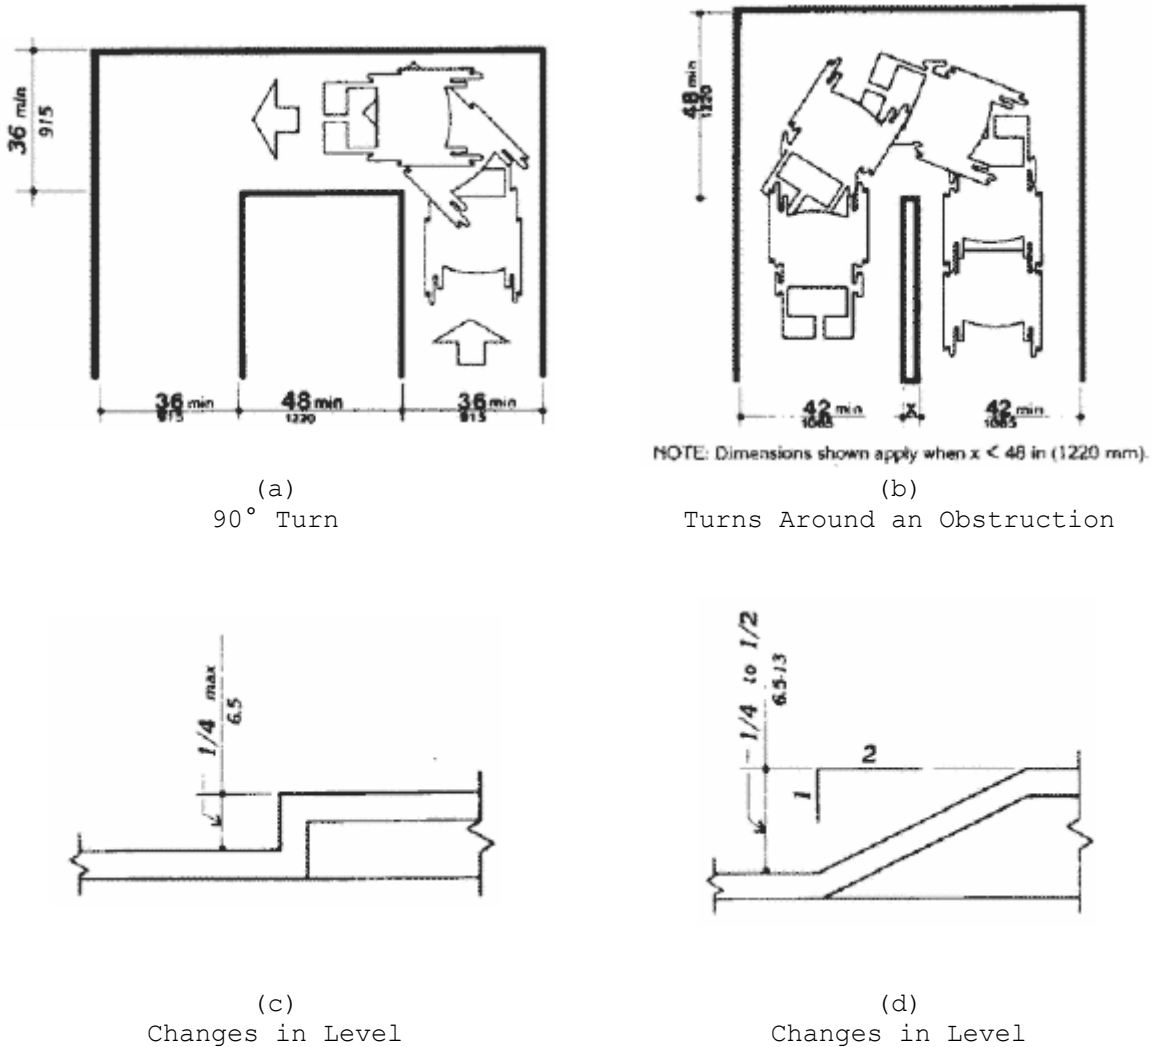


Fig. 7
Accessible Route

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)