

ITEM 4.6.3 | PARKING AND PASSENGER LOADING ZONES - PARKING SPACES

Accessible parking spaces shall be at least 96 in (2440 mm) wide. Parking access aisles shall be part of an accessible route to the building or facility entrance and shall comply with 4.3. Two accessible parking spaces may share a common access aisle (see Fig. 9). Parked vehicle overhangs shall not reduce the clear width of an accessible route. Parking spaces and access aisles shall be level with surface slopes not exceeding 1:50 (2%) in all directions.

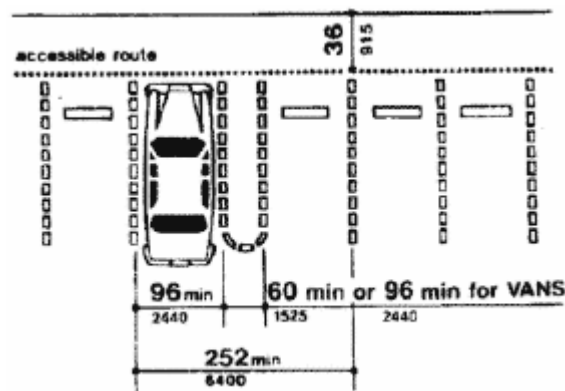


Fig. 9 Dimensions of Parking Spaces

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)