



ITEM 4.13.6 | DOORS - MANEUVERING CLEARANCES AT DOORS


Minimum maneuvering clearances at doors that are not automatic or power-assisted shall be as shown in Fig. 25. The floor or ground area within the required clearances shall be level and clear.

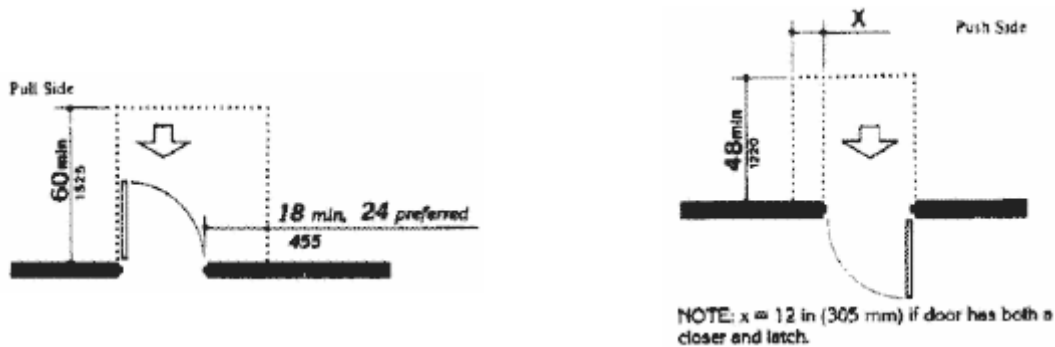

(a)
Front Approaches - Swinging Doors

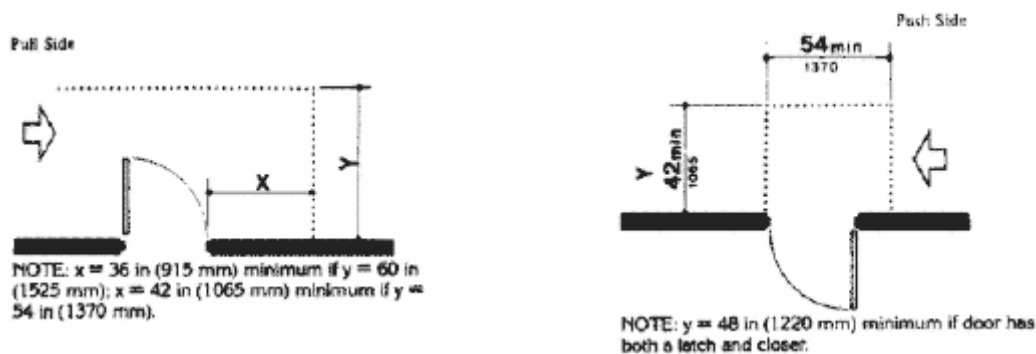


(b)
Hinge Side Approaches - Swinging Doors

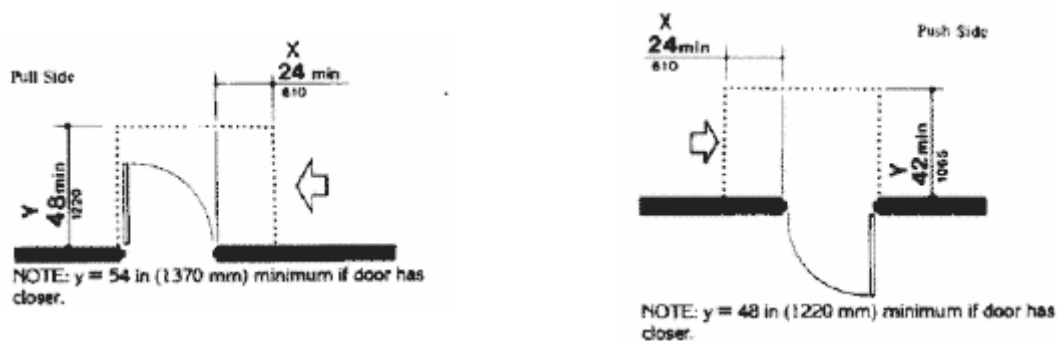


(c)
Latch Side Approaches - Swinging Doors

Note: All doors in alcoves shall comply with the clearances for front approaches.


Fig. 25 Maneuvering Clearances at Doors

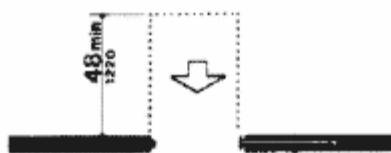

(d)
Front Approach - Sliding Doors and Folding Doors

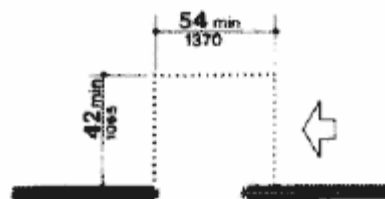

(e)
Slide Approach - Sliding Doors and Folding Doors

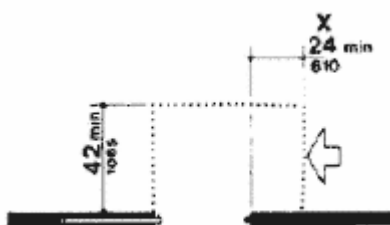

(f)
Latch Side Approach - Sliding Doors and Folding Doors
Fig. 25 Maneuvering Clearances at Doors

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)