



ITEM 4.15.2 | DRINKING FOUNTAINS AND WATER COOLERS - SPOUT HEIGHT


Spouts shall be no higher than 36 in (915 mm), measured from the floor or ground surfaces to the spout outlet (see Fig. 27(a)).

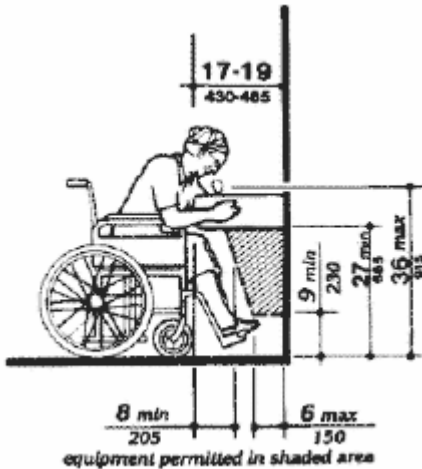


(a)
Spout Height and Knee Clearance

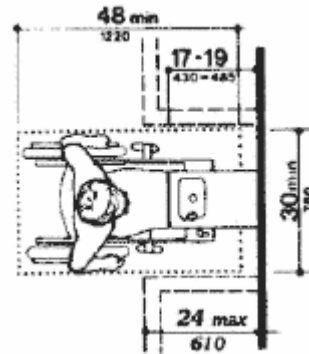

(b)
Clear Floor Space




(c)
Free-Standing Fountain or Cooler

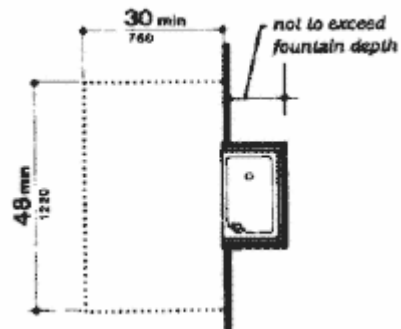


(d)
Built-In Fountain or Cooler


Fig. 27 Drinking Fountain and Water Coolers

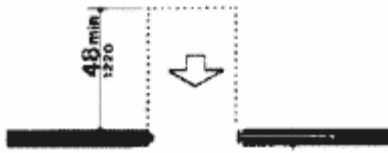

(d)
Front Approach - Sliding Doors and Folding Doors

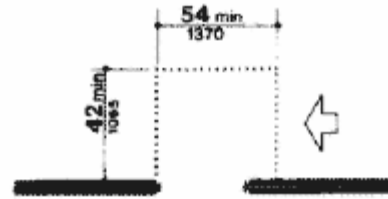

(e)
Slide Approach - Sliding Doors and Folding Doors

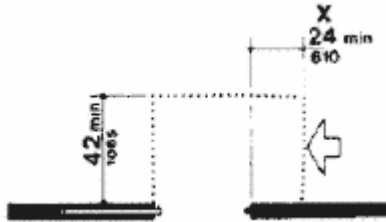

(f)
Latch Side Approach - Sliding Doors and Folding Doors
Fig. 25 Maneuvering Clearances at Doors

(“1991 Standards for Accessible Design”, 28 CFR 36 Appendix D)